



Apod Triple X 220x270x227cm

Manual



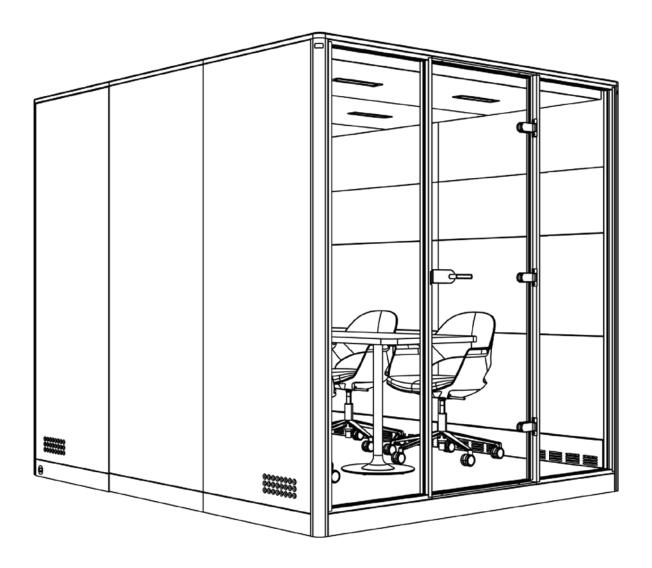

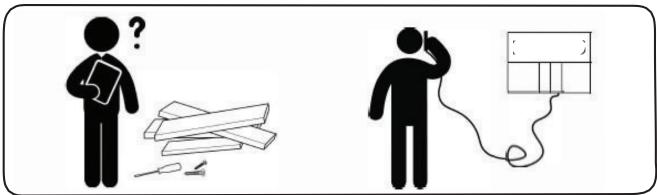





Use level tool at each step, from the beginning till the end.





Decide on the side of the power connection before assembly and activate the left/right side accordingly.



If the ceiling height is 2,50 m or less, make sure the electric switch on top is on and select the setting of the sensor as wanted before installation of the roof.



Always use approved materials during installation.



If you notice any damages when opening the crate, please take immediate pictures before installation and share with dealer/manufacturer. The manufacturer cannot be held responsible for any damages caused during installation.

CAUTIONS



Do not move the Apod when it is plugged in.



After the installation the product will be very heavy. Moving carefully and slowly if you need change places of the product. Make sure everything is stable in the POD during movement.



Disconnect the power cable before starting any cleaning and maintenance.



Do not plug any appliances more than 220-230 VAC.



Do not plug any devices more than 350 watt







Make sure that Calma is not plugged in before you open the access cover on top.



Do not climb on top of Calma or place any load on the roof of Calma



Do not use the pod if you notice any defects in the electrical equipment or if the pod is not working properly. Disconnect the power cable from the power outlet and contact your dealar or the manufacturer.



The ventilation and lights work at the same time, make sure the lights are on when you are in.



Do not block the ventilation grill.



Do not use the product if the ventillation grills are blocked.



Keep the door closed at all times.



Do not smoke inside.




Keep fire away.




Do not use utility knife to open packages and boxes.

COMPONENTS APOD

MAIN COMPONENT

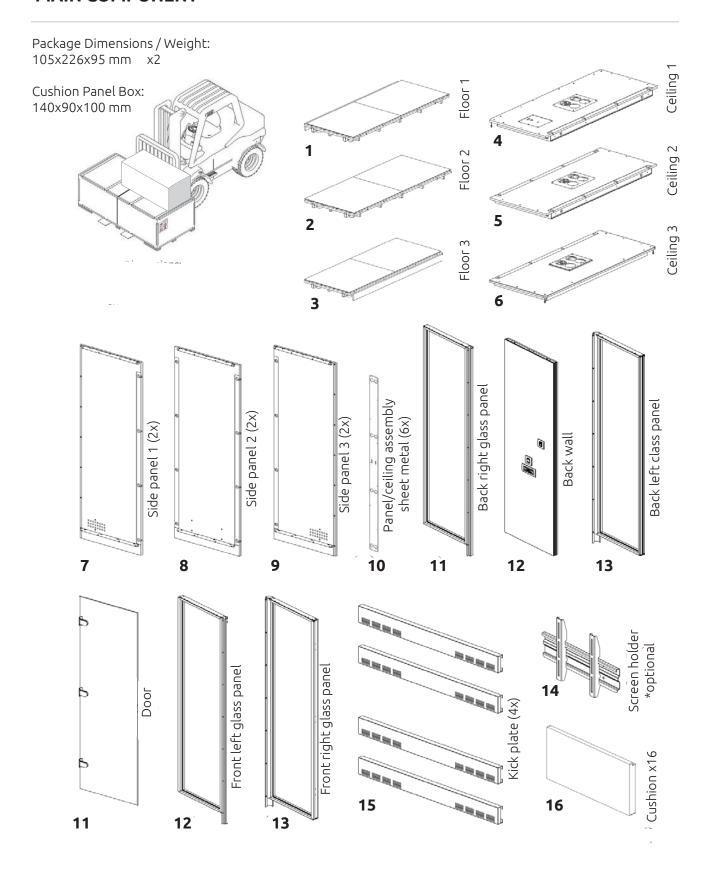


FASTENERS

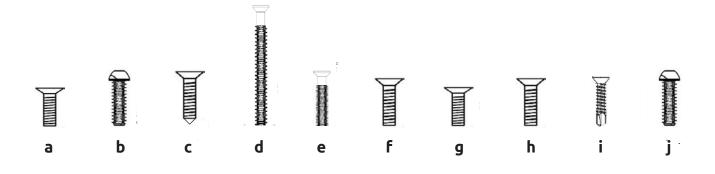





















TOOLS AND MANPOWER





2 ladders



power tool



allen key (4mm)



allen key (5mm)



level tool



allen key (1mm)




allen screwdriver (2mm)


^{*}Power tool, allen keys, allen screwdriver, level tol and stairs aire not included

TABLE INSTALLATION


MAIN COMPONENT

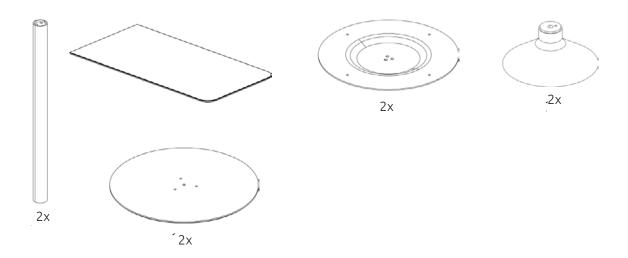


FASTENERS RS

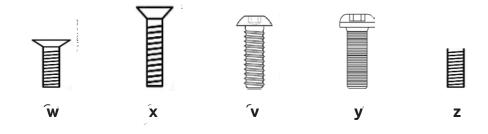



TOOLS AND MANPOWER

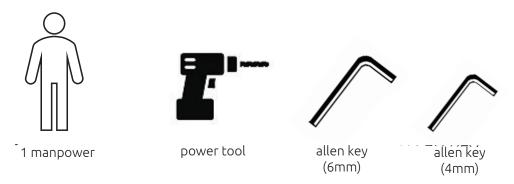


APOD FLOOR ASSEMBLY

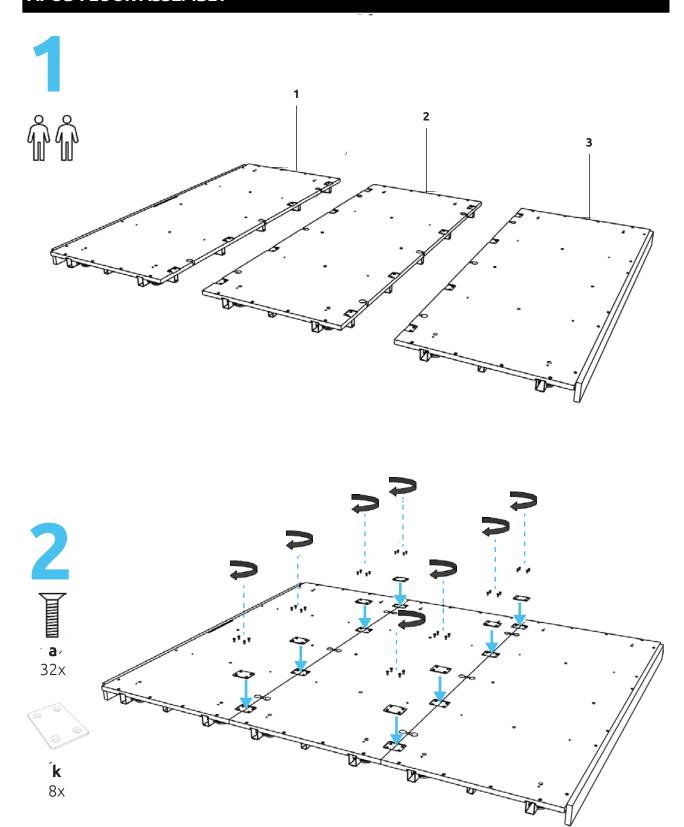


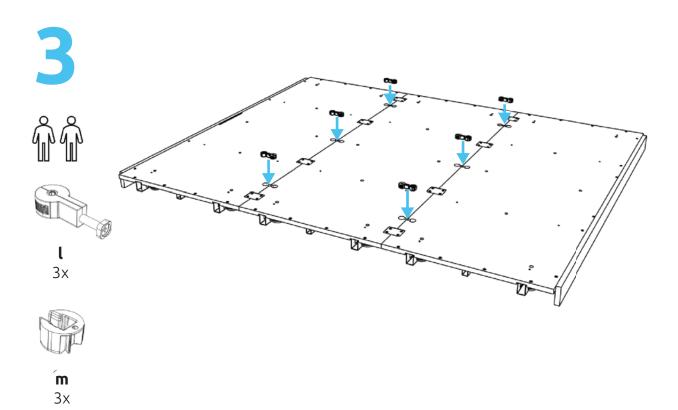

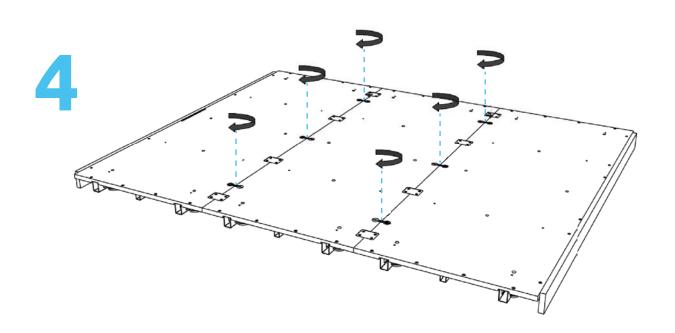

APOD INSTALLATION

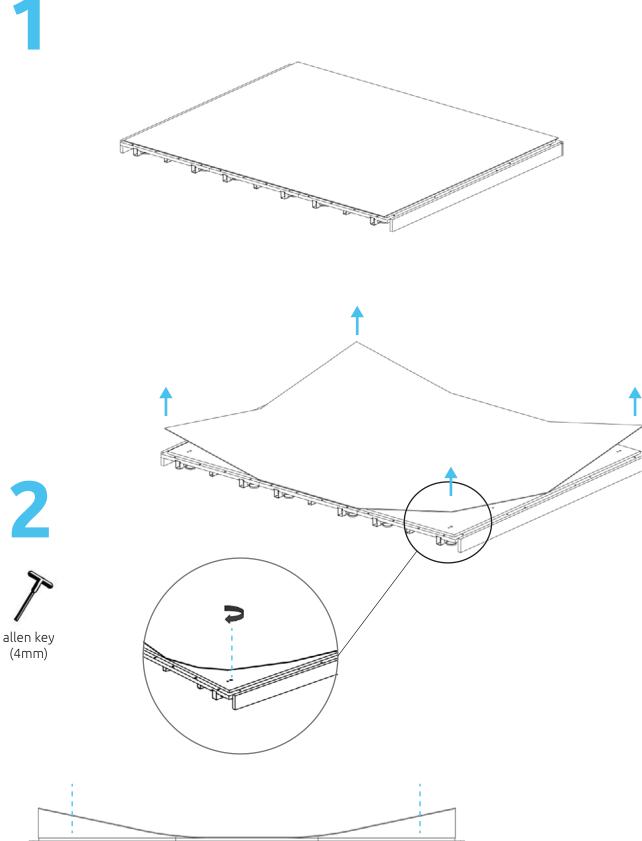

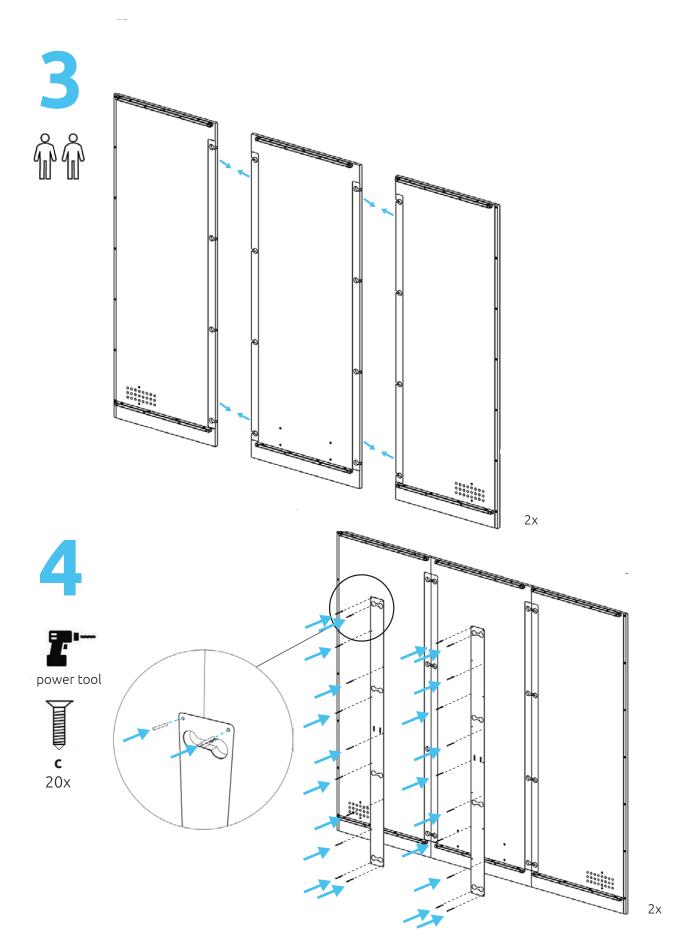










m 8x

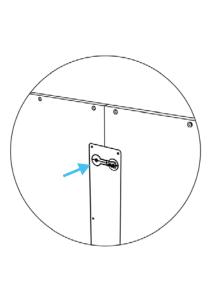

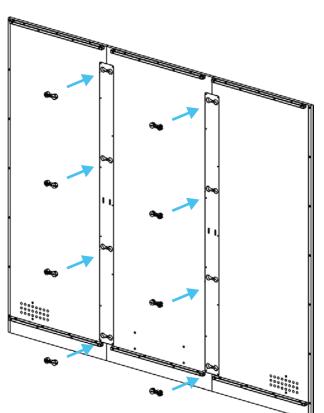



6 0000000

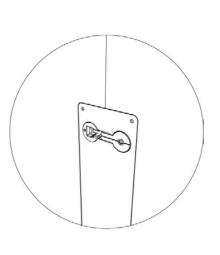



2x

2x

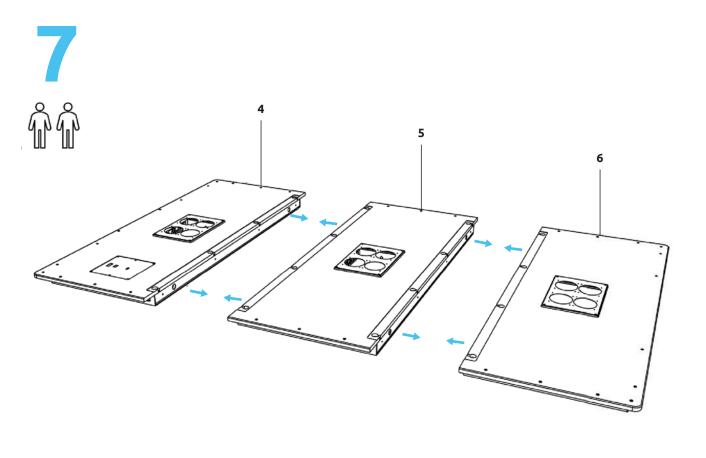


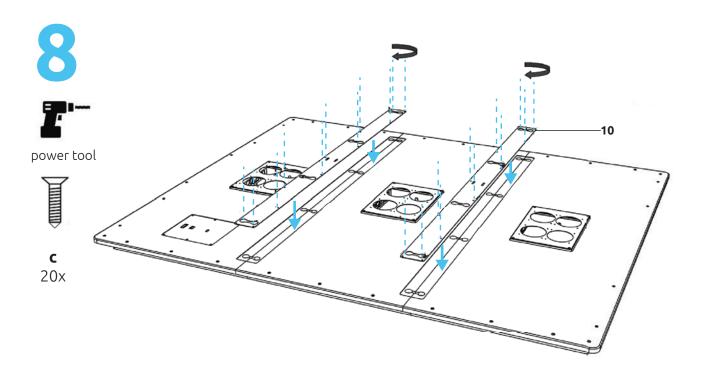

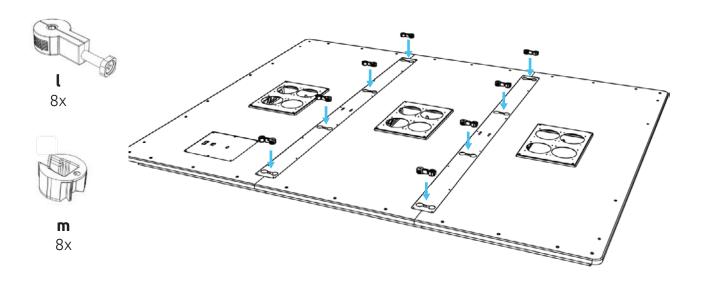

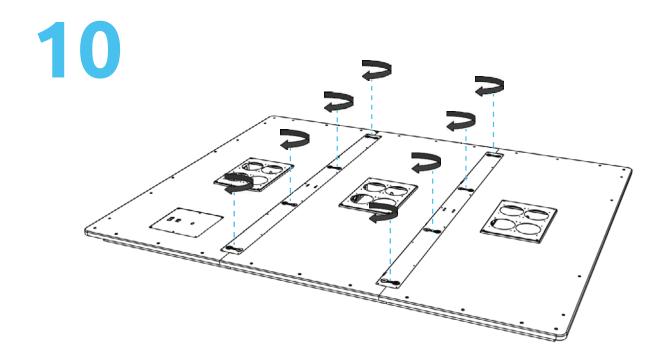




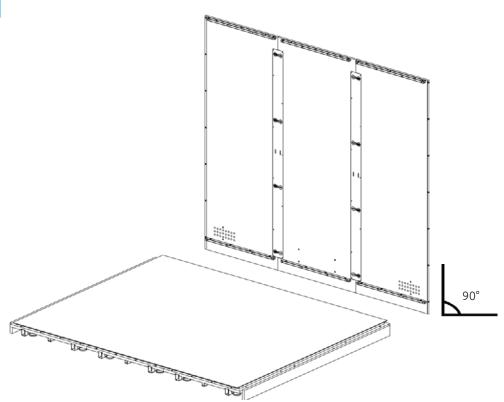









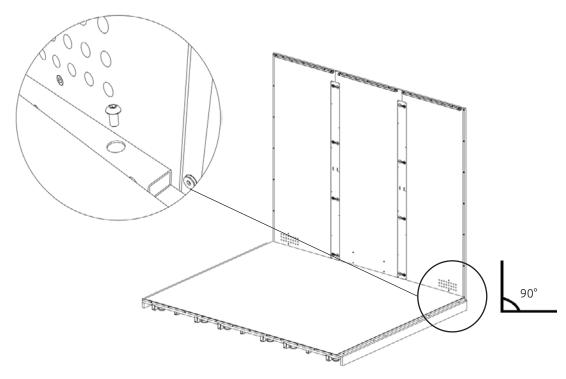

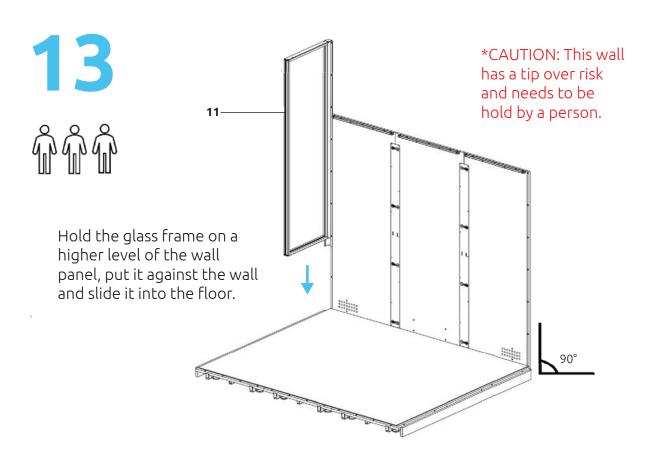


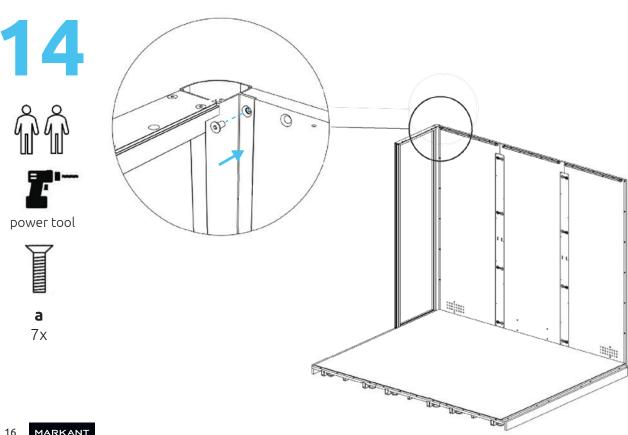

15 [°]




Hold the wall panel on a higher level of the glass frame, put it against the frame and slide it into the floor.

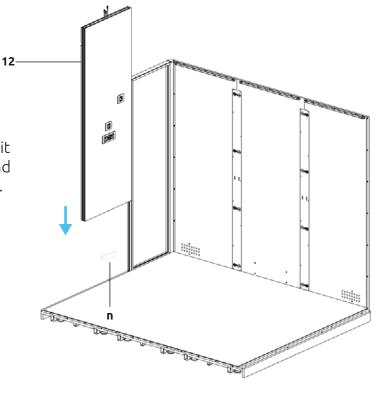


16 %




Hold the glass frame on a higher level of the wall panel, put it against the wall and slide it into the floor.

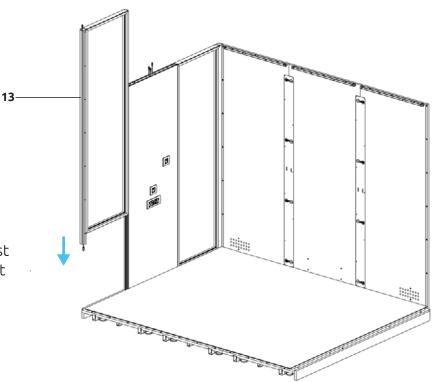

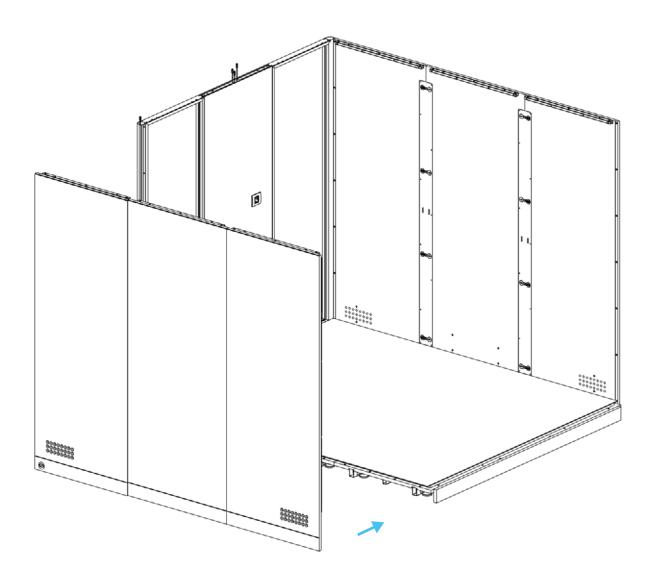

* Decision of the energy location has to be madeat this level.

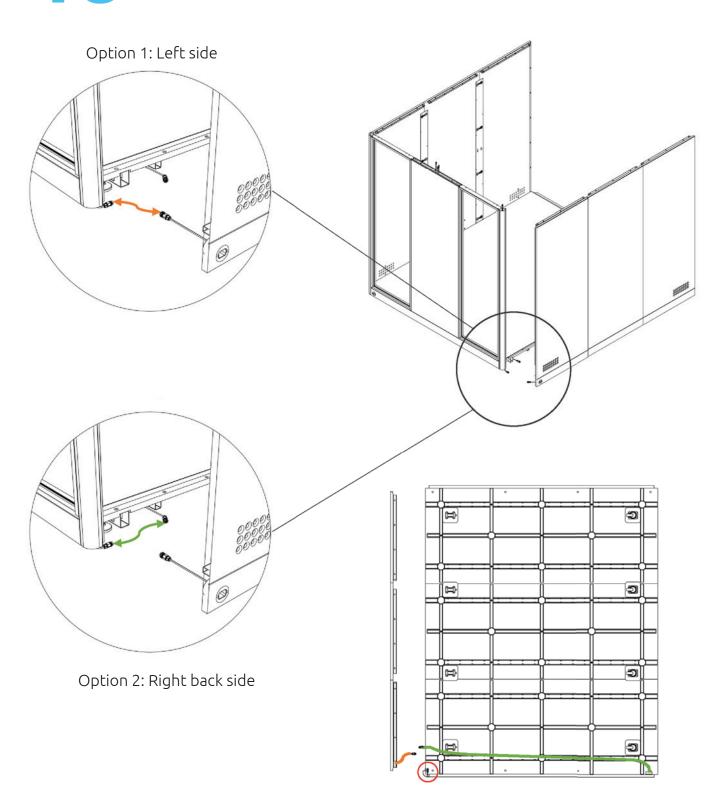






20 [°]








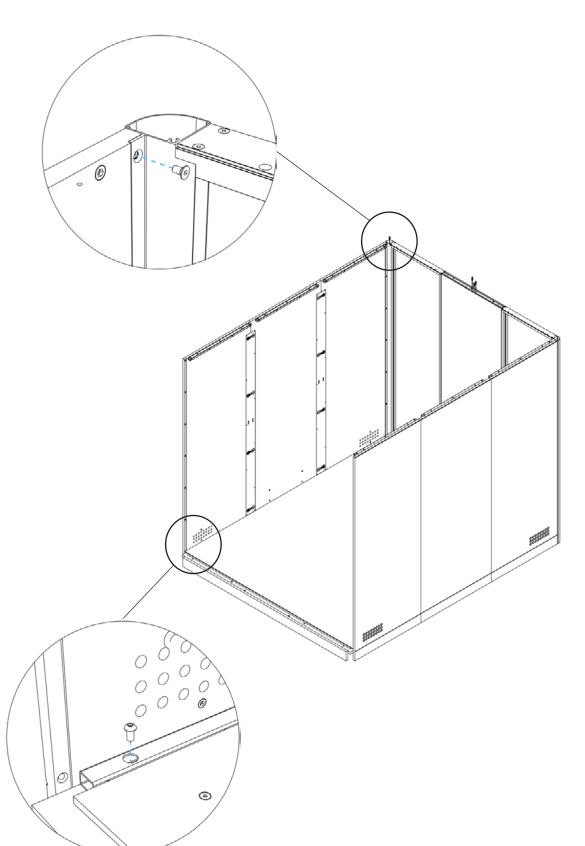



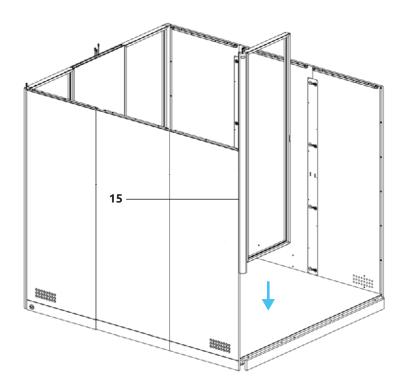



Hold the glass frame on a higher level of the wall panel, put it against the wall and slide it into the floor.








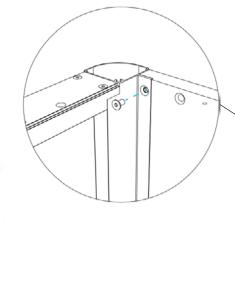

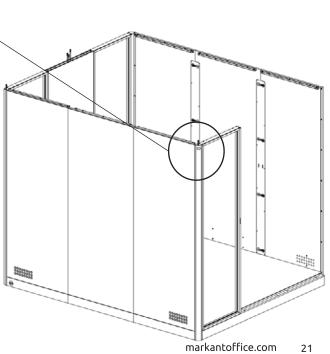

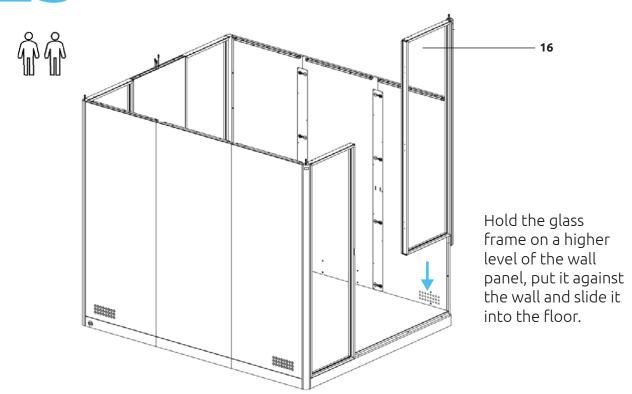


24 ^{°°}








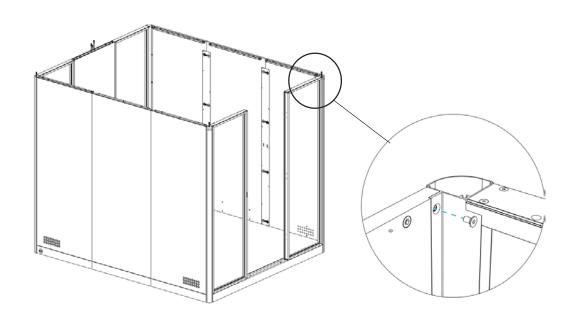










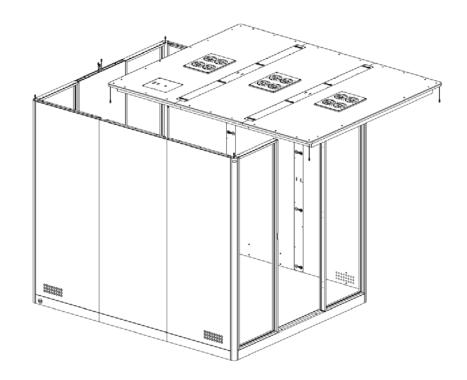


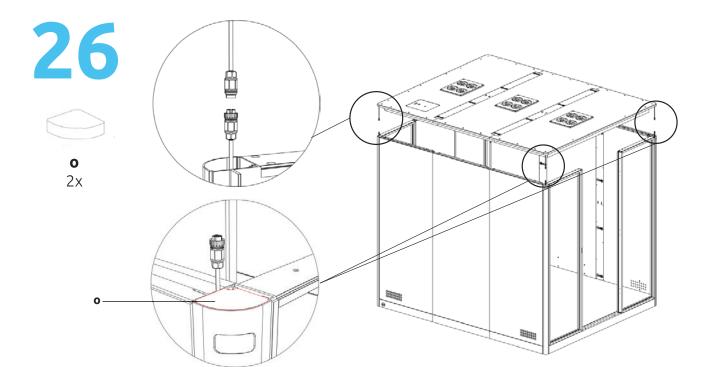


* Put the piece of foam in the profile after the wiring connection.

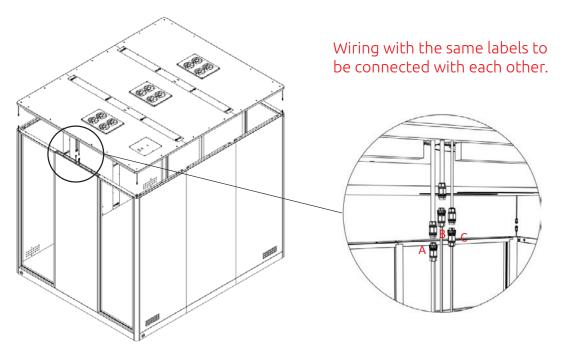

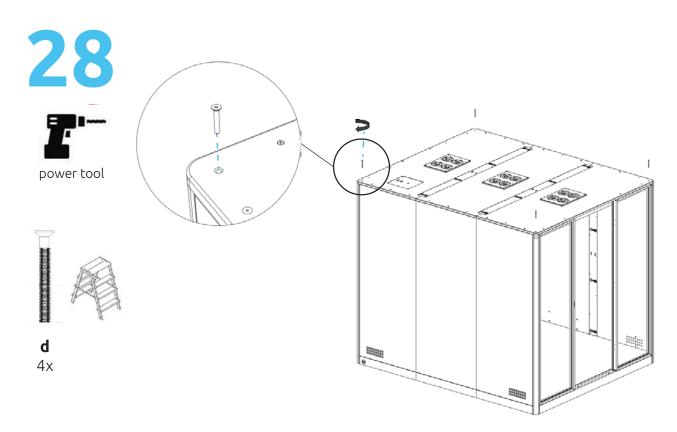

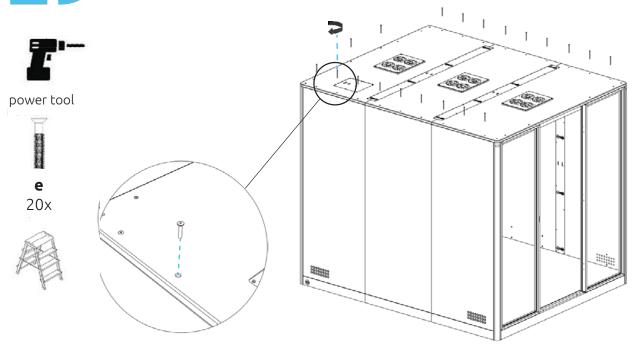

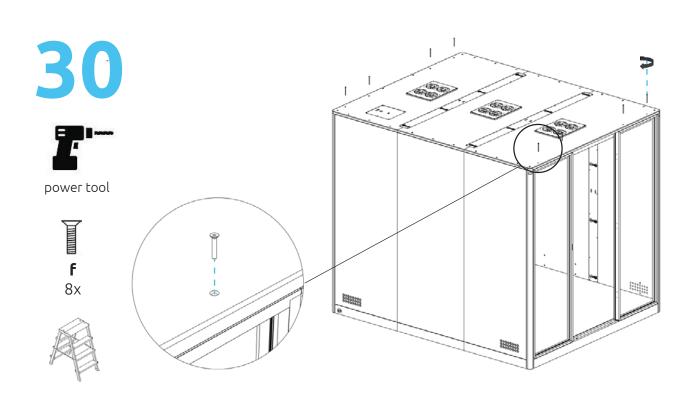





power tool




h 4x



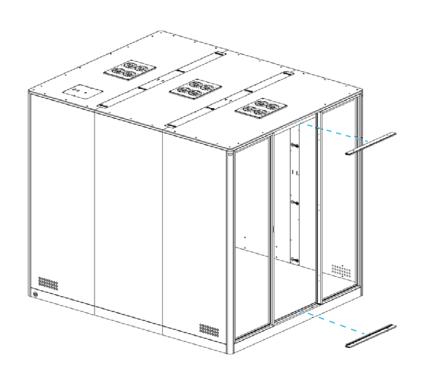

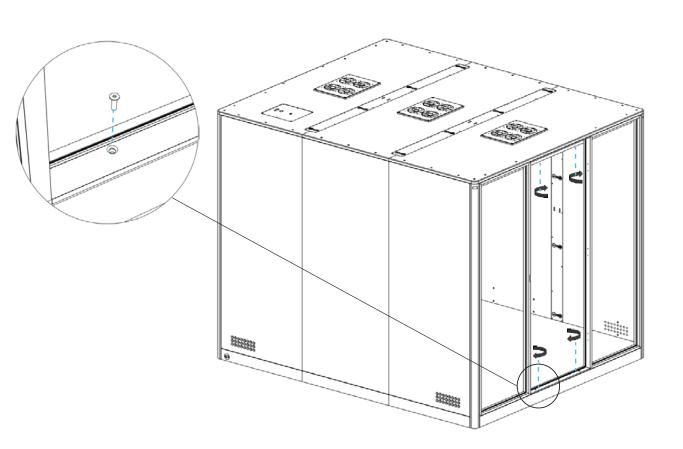



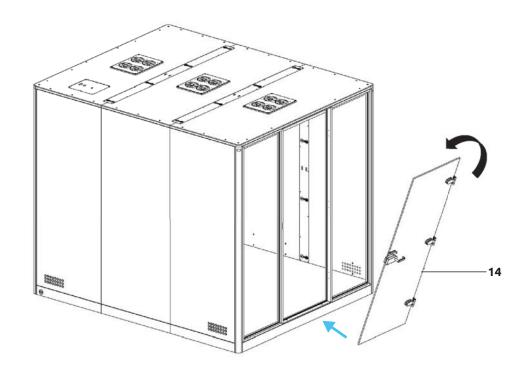

33















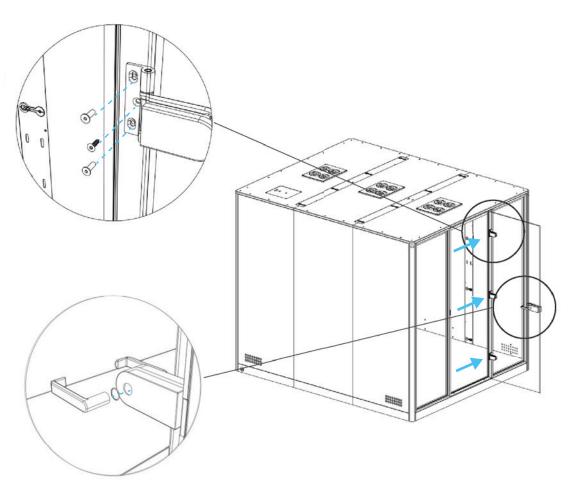




s 16x

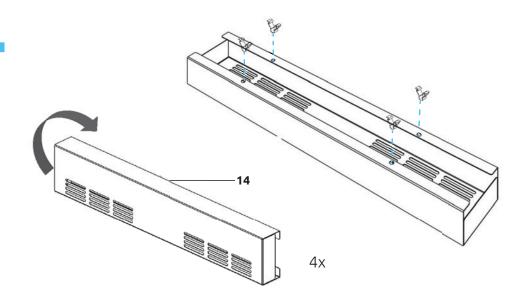



35





t 16x

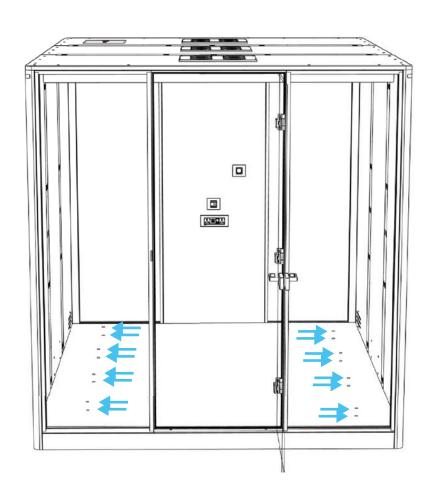


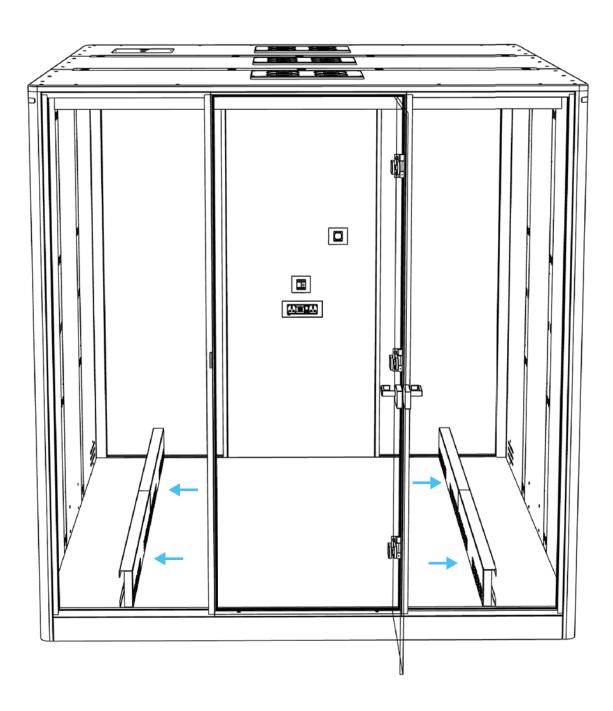




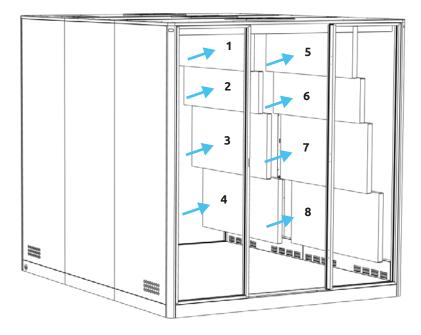




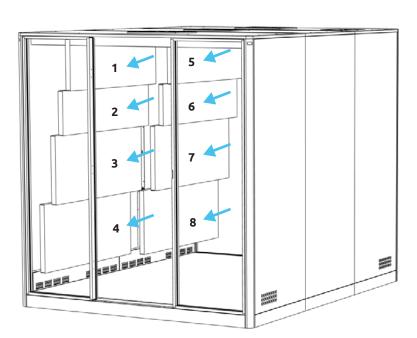


SCREEN HOLDER ASSEMBLY *optional

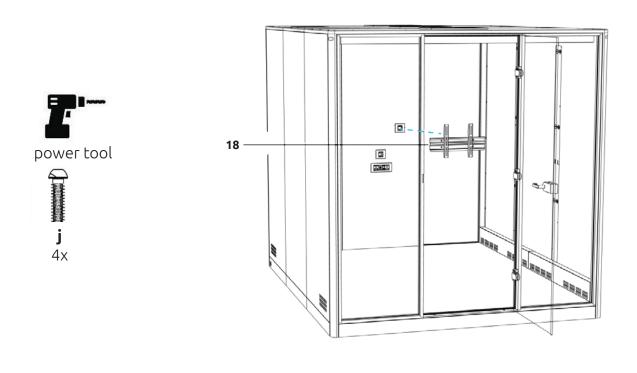


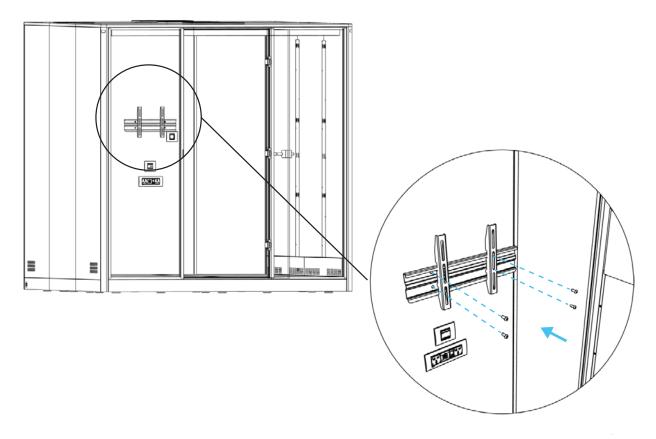

CHANGE LOCATION APOD

1

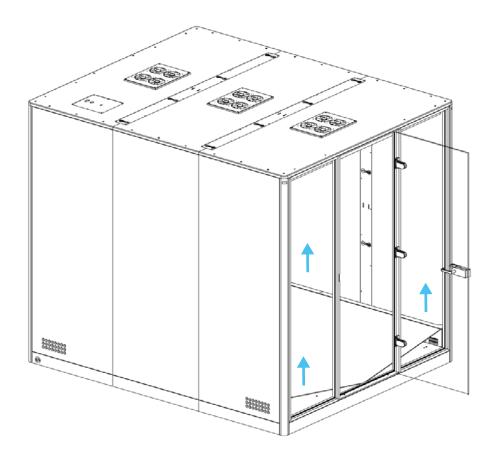

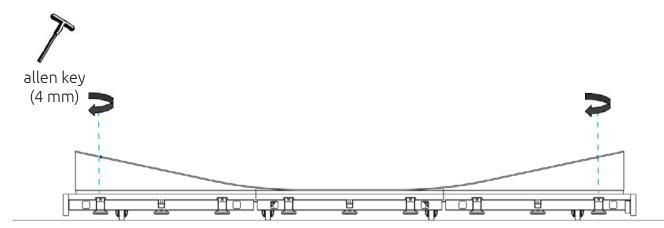

* Please change the Apod location before Seat and table installation.

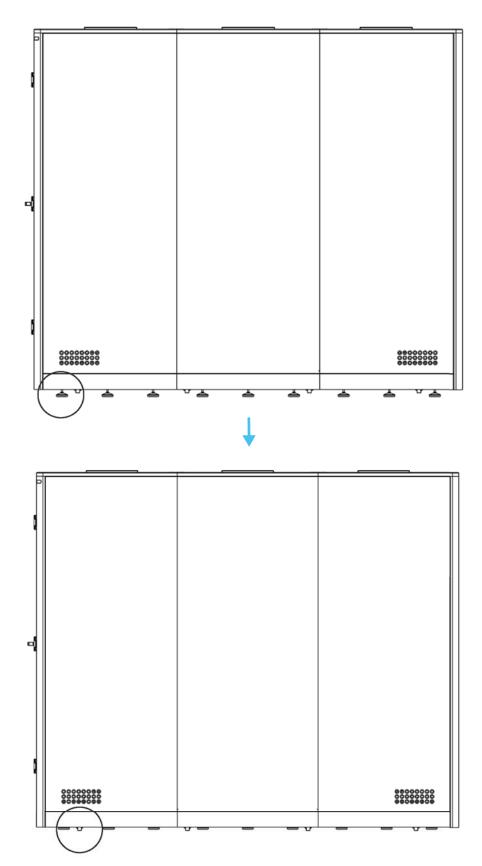


TABLE INSTALLATION

1





w 6x




z 2x





x 2x

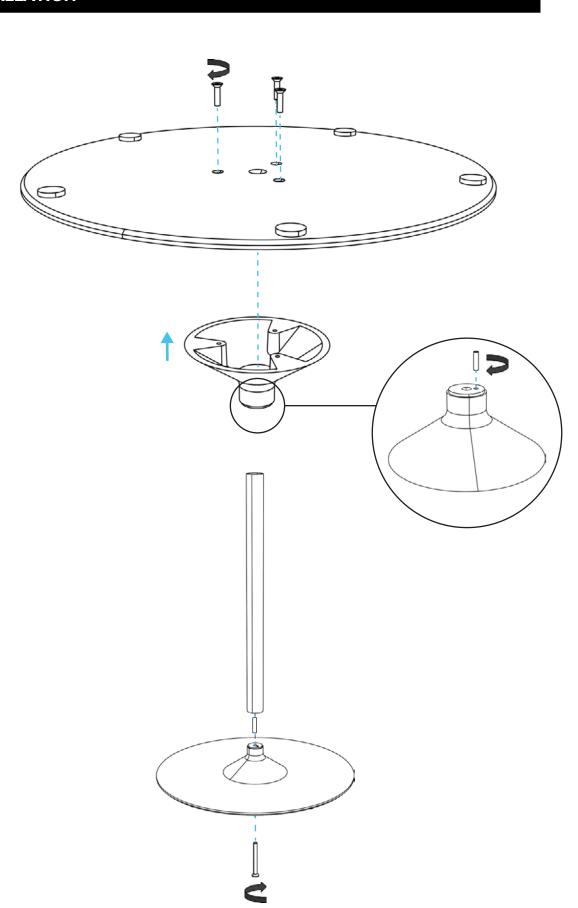












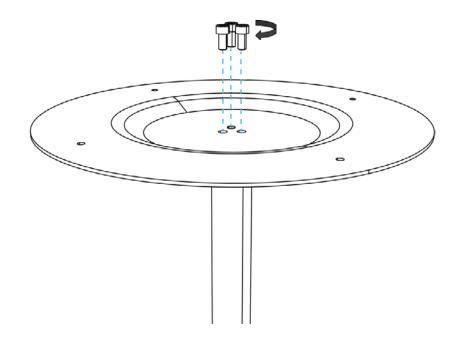




allen key




v 8x




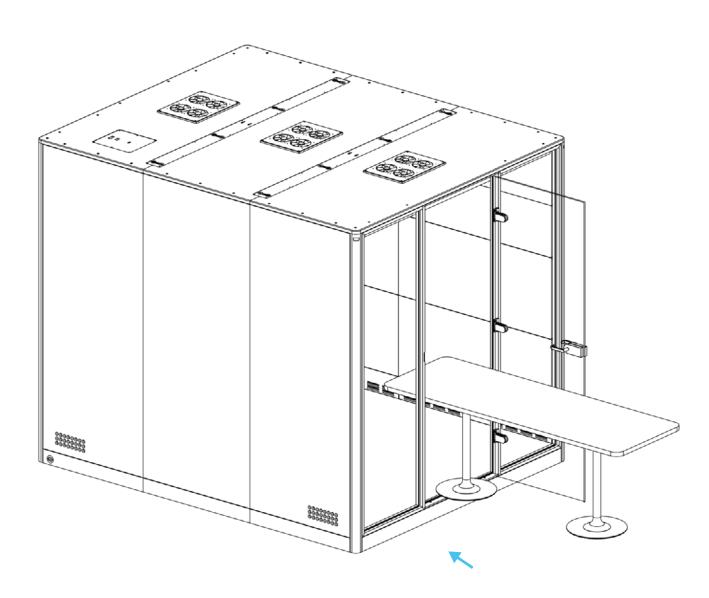


IN CASE YOU NEED TO ADJUST HINGES

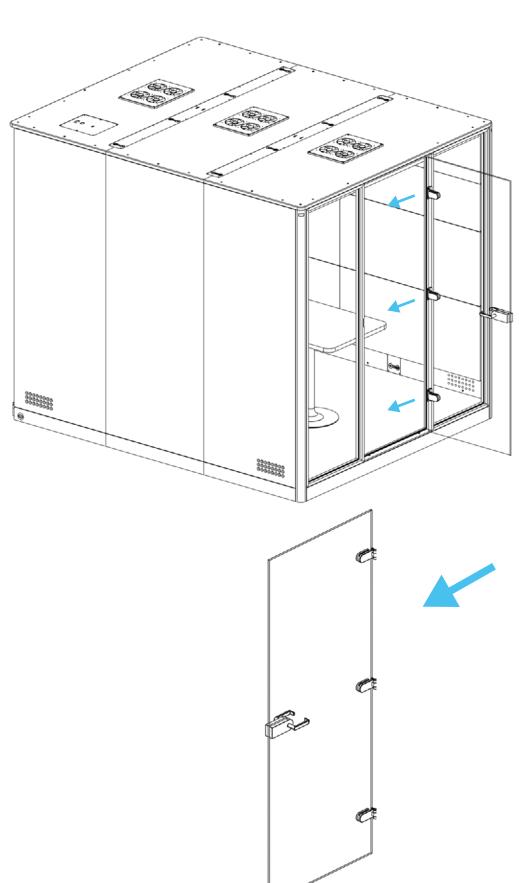



allen key (1 mm)

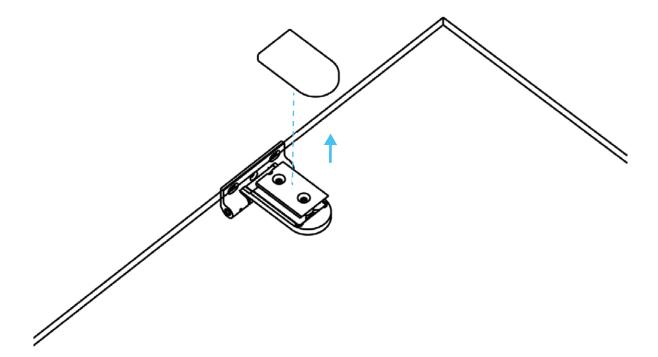





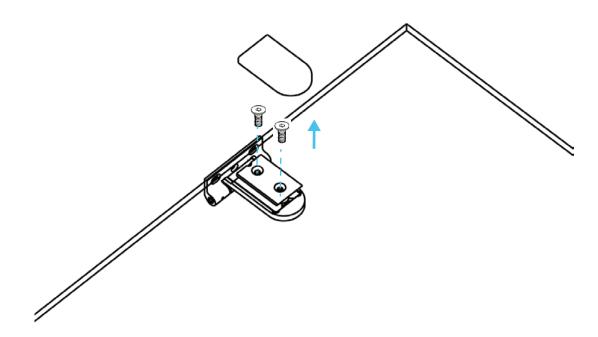

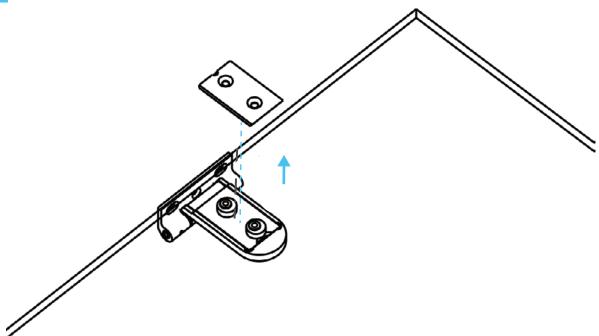


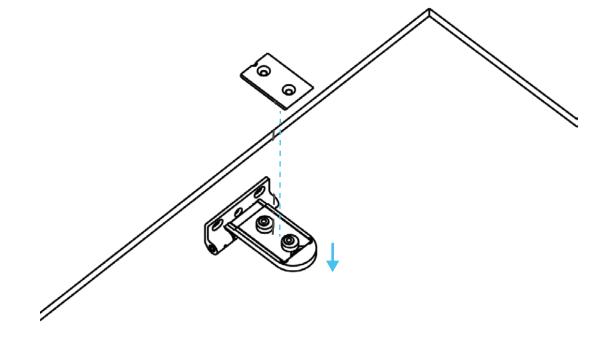


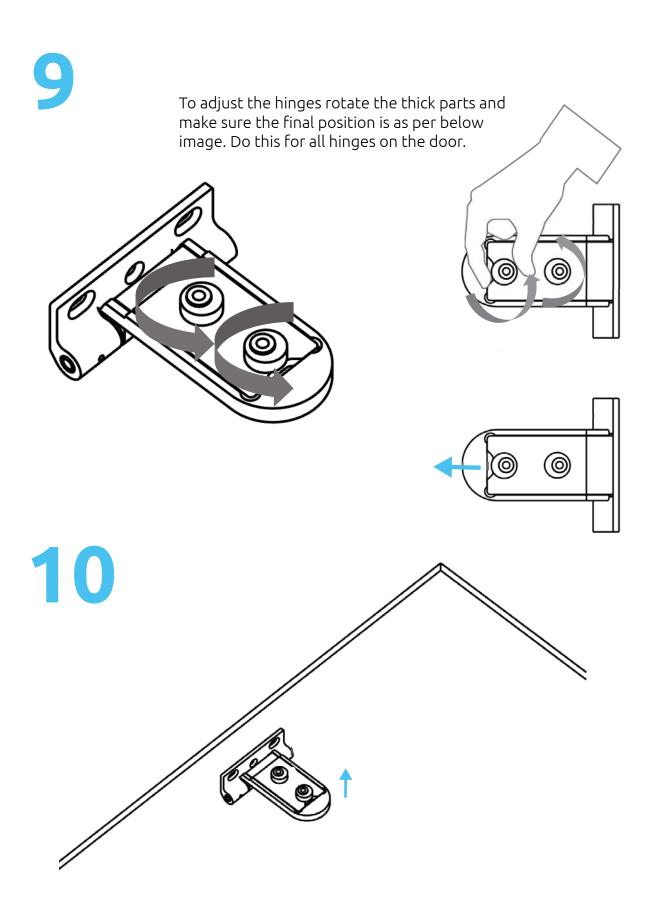


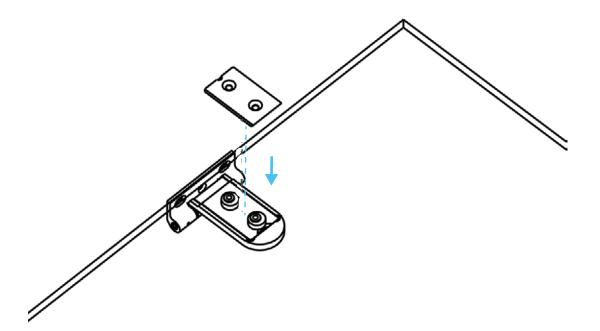





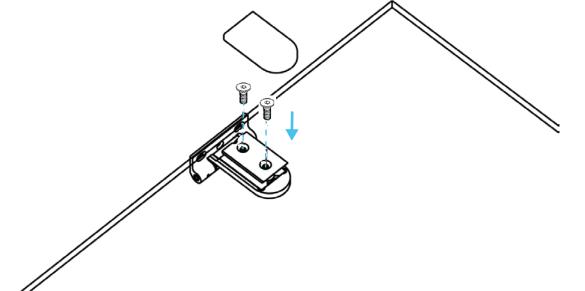


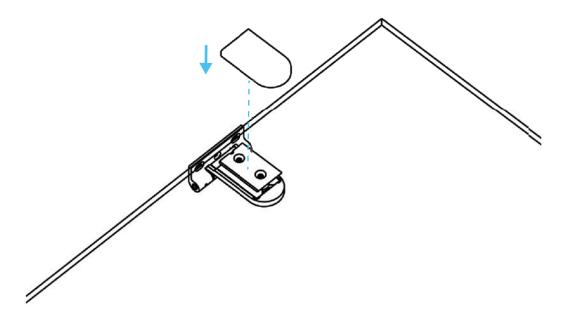

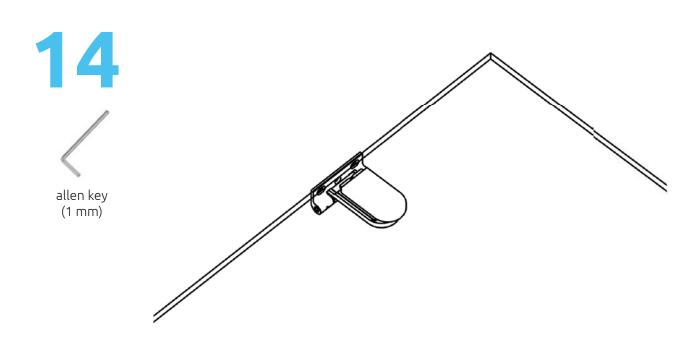


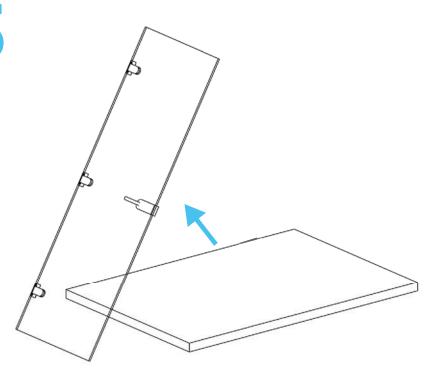

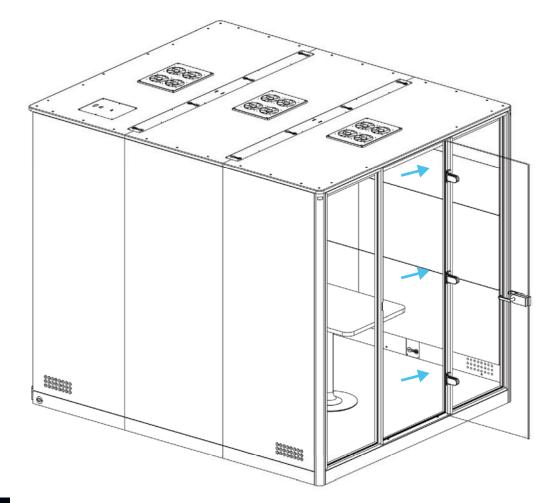

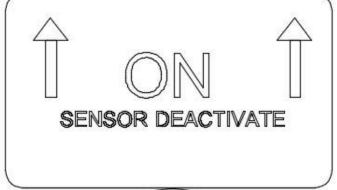

Light and fans constant on mode



Light and fans off



Light and fans on motion sensor mode